



POWERED BY

# Panasonic Batteries

## ENERGY CATALOG

A Comprehensive Guide by Product Grouping  
and Part Number for Panasonic OEM Batteries



**Lithium  
Primary**



**Lithium  
Ion**



**Nickel Metal  
Hydride**



**Lithium  
Rechargeable**



**VRLA**



**Alkaline**

Make Your Product Powered by Panasonic

**Panasonic ideas for life**



POWERED BY

# Panasonic Batteries

Panasonic is a leading supplier of batteries offering advanced cell manufacturing and product technologies, superior quality, and one of the broadest lines of primary and rechargeable batteries in the industry. Panasonic's product line includes Lithium-Ion, Lithium coin, Lithium primary cylindrical, Nickel Metal Hydride, Valve Regulated Lead Acid and Alkaline batteries.

Our batteries meet multiple market needs and are ideal for a variety of consumer, commercial and industrial portable power applications. Examples include: power tools, high powered flashlights, medical and dental equipment, uninterruptable power systems, wireless security, and RFID applications among others.

Please refer to the Panasonic OEM battery website at [www.panasonic.com/industrial/batteries-oem](http://www.panasonic.com/industrial/batteries-oem) to download the latest information or send in an e-mail request to [oembatteries@us.panasonic.com](mailto:oembatteries@us.panasonic.com).

## Contents

### LITHIUM ION

1

Panasonic rechargeable lithium ion batteries feature high energy density, high capacity, light weight and high power in both cylindrical and prismatic styles.

### NICKEL METAL HYDRIDE

2

Developed to meet the requirement for increasingly higher levels of energy demanded by today's electronic products, our NiMH batteries can offer up to three times the capacity of the same size standard Nickel Cadmium batteries.

### LITHIUM RECHARGEABLE COIN

3-4

Small component size rechargeable coin cell batteries for memory backup applications and main power sources in small electronic devices. Available in two product variations.

### LITHIUM PRIMARY COIN

5-7

3V Poly-carbonmonofluoride (BR) and Manganese Dioxide (CR) batteries for a variety of applications. Special versions of the BR series are also available with wider operating temperatures than the standard product.

### LITHIUM PRIMARY CYLINDRICAL

8-9

Poly-carbonmonofluoride (BR) and Manganese Dioxide (CR) cylindrical batteries and user replaceable photo batteries.

### VALVE REGULATED LEAD ACID

10-11

Panasonic's tough valve regulated lead acid (VRLA) rechargeable batteries are designed to provide outstanding performance in withstanding overcharge, overdischarge, and resisting vibration and shock.

### ALKALINE

12

Our popular alkaline batteries are designed to support industrial strength applications and are packaged for volume purchases.

# Lithium Ion Batteries

## GENERAL DESCRIPTION

Panasonic rechargeable lithium ion batteries feature high energy density, high capacity, light weight and high power in both cylindrical and prismatic styles.

Panasonic lithium ion batteries provide up to 3.6V per cell, so fewer batteries are required to power an application compared to conventional nickel cadmium and nickel metal hydride batteries.

Notice to readers: In order to ensure the use of properly designed safety circuits with Lithium ion battery packs, Panasonic lithium ion cells are not sold as "off the shelf" products and can only be assembled into packs by authorized pack assembly centers that have been approved for Lithium ion pack design and assembly.

All Panasonic Lithium Ion batteries are covered by the Rechargeable Battery Recycling Corporation's (RBRC) recycling program.

## FEATURES

- High energy density
- High capacity
- Light weight
- Over 500 cycles

## APPLICATIONS

- Digital cameras
- Cellular phones
- Notebook PC's
- Portable devices



## CYLINDRICAL TYPE

| Model Number* | Nominal Voltage (V) | Typical <sup>1</sup> Capacity (mAh) | Dimensions                                                                     |                                                                                | Weight oz. (g) |
|---------------|---------------------|-------------------------------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------|
|               |                     |                                     | Diameter inch (mm)                                                             | Height inch (mm)                                                               |                |
| CGR18650CG    | 3.6                 | 2250                                | 0.73 <sup>+0.03</sup> <sub>-0.03</sub> (18.6 <sup>+0.7</sup> <sub>-0.7</sub> ) | 2.57 <sup>+0.04</sup> <sub>-0.04</sub> (65.2 <sup>+0.0</sup> <sub>-1.0</sub> ) | 1.55 (44)      |
| NCR18650      | 3.6                 | 2900                                | 0.73 <sup>+0.03</sup> <sub>-0.03</sub> (18.6 <sup>+0.7</sup> <sub>-0.7</sub> ) | 2.57 <sup>+0.04</sup> <sub>-0.04</sub> (65.2 <sup>+0.0</sup> <sub>-1.0</sub> ) | 1.56 (44.5)    |
| NCR18500      | 3.6                 | 2000                                | 0.73 <sup>+0.03</sup> <sub>-0.03</sub> (18.6 <sup>+0.8</sup> <sub>-0.8</sub> ) | 1.97 <sup>+0.04</sup> <sub>-0.04</sub> (50.0 <sup>+0.0</sup> <sub>-1.0</sub> ) | 1.18 (33.5)    |

## PRISMATIC TYPE - ALUMINUM CASE

| Model Number* | Nominal Voltage (V) | Typical <sup>1</sup> Capacity (mAh) | Dimensions                                                                     |                                                                                |                                                                                | Weight oz. (g) |
|---------------|---------------------|-------------------------------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------|
|               |                     |                                     | Width inch (mm)                                                                | Height inch (mm)                                                               | Thickness <sup>2</sup> inch (mm)                                               |                |
| CGA103450A    | 3.7                 | 1950                                | 1.34 <sup>+0.02</sup> <sub>-0.02</sub> (34.0 <sup>+0.0</sup> <sub>-0.6</sub> ) | 1.97 <sup>+0.04</sup> <sub>-0.04</sub> (50.0 <sup>+0.0</sup> <sub>-1.0</sub> ) | 0.41 <sup>+0.02</sup> <sub>-0.02</sub> (10.5 <sup>+0.0</sup> <sub>-0.6</sub> ) | 1.38 (39)      |

## HIGH RATE CYLINDRICAL TYPE

| Model Number* | Nominal Voltage (V) | Typical <sup>1</sup> Capacity (mAh) | Dimensions                                                                     |                                                                                | Weight oz. (g) |
|---------------|---------------------|-------------------------------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------|
|               |                     |                                     | Diameter inch (mm)                                                             | Height inch (mm)                                                               |                |
| CGR26650A     | 3.6                 | 2650                                | 1.04 <sup>+0.03</sup> <sub>-0.03</sub> (26.5 <sup>+0.0</sup> <sub>-0.7</sub> ) | 2.57 <sup>+0.04</sup> <sub>-0.04</sub> (65.2 <sup>+0.0</sup> <sub>-1.0</sub> ) | 3.2 (90)       |
| CGR26650B     | 3.6                 | 3300                                | 1.04 <sup>+0.03</sup> <sub>-0.03</sub> (26.5 <sup>+0.0</sup> <sub>-0.7</sub> ) | 2.57 <sup>+0.04</sup> <sub>-0.04</sub> (65.2 <sup>+0.0</sup> <sub>-1.0</sub> ) | 3.2 (90)       |
| CGR18650KA    | 3.6                 | 1750                                | 0.73 <sup>+0.03</sup> <sub>-0.03</sub> (18.6 <sup>+0.7</sup> <sub>-0.7</sub> ) | 2.57 <sup>+0.04</sup> <sub>-0.04</sub> (65.2 <sup>+0.0</sup> <sub>-1.0</sub> ) | 1.55 (44)      |
| CGR18650CH    | 3.6                 | 2250                                | 0.73 <sup>+0.03</sup> <sub>-0.03</sub> (18.6 <sup>+0.7</sup> <sub>-0.7</sub> ) | 2.57 <sup>+0.04</sup> <sub>-0.04</sub> (65.2 <sup>+0.0</sup> <sub>-1.0</sub> ) | 1.55 (44)      |
| CGR18650K     | 3.6                 | 1650                                | 0.73 <sup>+0.03</sup> <sub>-0.03</sub> (18.6 <sup>+0.7</sup> <sub>-0.7</sub> ) | 2.57 <sup>+0.04</sup> <sub>-0.04</sub> (65.2 <sup>+0.0</sup> <sub>-1.0</sub> ) | 1.55 (47)      |

1. 4.2V charge.

2. Thickness at time of shipment.

\*Model numbers may change due to capacity upgrades. Check our website for most recent information and specifications on Lithium Ion cells.

# Nickel Metal Hydride Batteries



## GENERAL DESCRIPTION

Panasonic Nickel-Metal Hydride batteries were developed to meet the requirement for increasingly higher levels of energy demanded by today's electronic products. Our Nickel-Metal Hydride batteries can offer up to three times the capacity of the same size standard Nickel Cadmium batteries. Due to their increased capacity and energy density features, users can expect a longer time between charges and longer running time.

All Panasonic Nickel Metal Hydride batteries are covered by the Rechargeable Battery Recycling Corporation's (RBRC) recycling program.



## FEATURES

- High energy density
- Rapid charge
- Excellent cycle life
- Excellent discharge characteristics

## APPLICATIONS

- Two-way radios
  - Standby / Back Up
  - Test Equipment
  - Power tools
  - R/C hobby
  - Digital cameras
- Applications where high-energy and small size are critical*

| CYLINDRICAL TYPE       |                |                     |                                 |               |              |           |                                                                                |                                                                                |                           |
|------------------------|----------------|---------------------|---------------------------------|---------------|--------------|-----------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------|---------------------------|
| Model Number           | Size           | Nominal Voltage (V) | Discharge Capacity <sup>a</sup> |               | Rapid Charge |           | Dimensions                                                                     |                                                                                | Approximate Weight oz.(g) |
|                        |                |                     | Average <sup>d</sup> (mAh)      | Minimum (mAh) | Current (mA) | Hours (h) | Diameter inch (mm)                                                             | Height inch (mm)                                                               |                           |
| HHR60AAAH <sup>1</sup> | AAA            | 1.2                 | 550                             | 500           | 250          | 2.4*      | 0.41 <sup>+0.03</sup> <sub>-0.03</sub> (10.5 <sup>+0.7</sup> <sub>-0.7</sub> ) | 1.75 <sup>+0.04</sup> <sub>-0.04</sub> (44.5 <sup>+1.0</sup> <sub>-1.0</sub> ) | 0.46 (13)                 |
| HHR70AAAJ              | AAA            | 1.2                 | 730                             | 700           | 700          | 1.2       | 0.41 <sup>+0.03</sup> <sub>-0.03</sub> (10.5 <sup>+0.7</sup> <sub>-0.7</sub> ) | 1.75 <sup>+0.04</sup> <sub>-0.04</sub> (44.5 <sup>+1.0</sup> <sub>-1.0</sub> ) | 0.42 (12)                 |
| HHR75AAAB              | AAA            | 1.2                 | 730                             | 700           | 450          | 1.7       | 0.41 <sup>+0.03</sup> <sub>-0.03</sub> (10.5 <sup>+0.7</sup> <sub>-0.7</sub> ) | 1.75 <sup>+0.04</sup> <sub>-0.04</sub> (44.5 <sup>+1.0</sup> <sub>-1.0</sub> ) | 0.42 (12)                 |
| HHR120AA               | 4/5AA          | 1.2                 | 1220                            | 1150          | 1200         | 1.2       | 0.57 <sup>+0.03</sup> <sub>-0.03</sub> (14.5 <sup>+0.7</sup> <sub>-0.7</sub> ) | 1.69 <sup>+0.04</sup> <sub>-0.04</sub> (43.0 <sup>+1.0</sup> <sub>-1.0</sub> ) | 0.81 (23)                 |
| HHR150AA               | AA             | 1.2                 | 1580                            | 1500          | 1500         | 1.2       | 0.57 <sup>+0.03</sup> <sub>-0.03</sub> (14.5 <sup>+0.7</sup> <sub>-0.7</sub> ) | 1.97 <sup>+0.04</sup> <sub>-0.04</sub> (50.0 <sup>+1.0</sup> <sub>-1.0</sub> ) | 0.92 (26)                 |
| HHR210AAB              | AA             | 1.2                 | 2080                            | 2000          | 1200         | 2.0       | 0.57 <sup>+0.03</sup> <sub>-0.03</sub> (14.5 <sup>+0.7</sup> <sub>-0.7</sub> ) | 1.99 <sup>+0.05</sup> <sub>-0.05</sub> (50.5 <sup>+1.0</sup> <sub>-1.0</sub> ) | 1.02 (29)                 |
| HHR200A                | 4/5A           | 1.2                 | 2040                            | 2000          | 1700         | 1.4       | 0.67 <sup>+0.03</sup> <sub>-0.03</sub> (17.0 <sup>+0.7</sup> <sub>-0.7</sub> ) | 1.69 <sup>+0.06</sup> <sub>-0.06</sub> (43.0 <sup>+1.5</sup> <sub>-1.5</sub> ) | 1.13 (32)                 |
| HHR210A                | A              | 1.2                 | 2200                            | 2100          | 2100         | 1.2       | 0.67 <sup>+0.03</sup> <sub>-0.03</sub> (17.0 <sup>+0.7</sup> <sub>-0.7</sub> ) | 1.97 <sup>+0.06</sup> <sub>-0.06</sub> (50.0 <sup>+1.5</sup> <sub>-1.5</sub> ) | 1.34 (38)                 |
| HHR210AH <sup>1</sup>  | A              | 1.2                 | 2050                            | 1900          | 1000         | 2.3*      | 0.67 <sup>+0.03</sup> <sub>-0.03</sub> (17.0 <sup>+0.7</sup> <sub>-0.7</sub> ) | 1.97 <sup>+0.06</sup> <sub>-0.06</sub> (50.0 <sup>+1.5</sup> <sub>-1.5</sub> ) | 1.30 (36)                 |
| HHR380A                | L-A            | 1.2                 | 3800                            | 3700          | 2000         | dT/dt*    | 0.67 <sup>+0.03</sup> <sub>-0.03</sub> (17.0 <sup>+0.7</sup> <sub>-0.7</sub> ) | 2.64 <sup>+0.06</sup> <sub>-0.06</sub> (67.0 <sup>+1.5</sup> <sub>-1.5</sub> ) | 1.87 (53)                 |
| HHR330APH              | 18670(L-Fat-A) | 1.2                 | 3300                            | 3200          | 1650         | 2.4*      | 0.72 <sup>+0.03</sup> <sub>-0.03</sub> (18.2 <sup>+0.7</sup> <sub>-0.7</sub> ) | 2.64 <sup>+0.06</sup> <sub>-0.06</sub> (67.0 <sup>+1.5</sup> <sub>-1.5</sub> ) | 2.12 (60)                 |
| HHR370AH <sup>1</sup>  | 18670(L-Fat-A) | 1.2                 | 3700                            | 3500          | —            | —         | 0.72 <sup>+0.03</sup> <sub>-0.03</sub> (18.2 <sup>+0.7</sup> <sub>-0.7</sub> ) | 2.64 <sup>+0.06</sup> <sub>-0.06</sub> (67.0 <sup>+1.5</sup> <sub>-1.5</sub> ) | 2.12 (60)                 |
| HHR450A <sup>2</sup>   | 18670(L-Fat-A) | 1.2                 | 4500                            | 4200          | 2000         | dT/dt*    | 0.72 <sup>+0.03</sup> <sub>-0.03</sub> (18.2 <sup>+0.7</sup> <sub>-0.7</sub> ) | 2.64 <sup>+0.06</sup> <sub>-0.06</sub> (67.0 <sup>+1.5</sup> <sub>-1.5</sub> ) | 2.12 (60)                 |
| HHR200SCP <sup>3</sup> | 4/5SC          | 1.2                 | 2100                            | 1900          | 2000         | 1.2       | 0.91 <sup>+0.04</sup> <sub>-0.04</sub> (23.0 <sup>+1.0</sup> <sub>-1.0</sub> ) | 1.34 <sup>+0.06</sup> <sub>-0.06</sub> (34.0 <sup>+1.5</sup> <sub>-1.5</sub> ) | 1.50 (42)                 |
| HHR250SCH <sup>1</sup> | SC             | 1.2                 | 2650                            | 2500          | 1250         | 2.4       | 0.91 <sup>+0.04</sup> <sub>-0.04</sub> (23.0 <sup>+1.0</sup> <sub>-1.0</sub> ) | 1.69 <sup>+0.06</sup> <sub>-0.06</sub> (43.0 <sup>+1.5</sup> <sub>-1.5</sub> ) | 1.94 (55)                 |
| HHR260SCP <sup>3</sup> | SC             | 1.2                 | 2600                            | 2450          | 2600         | 1.2       | 0.91 <sup>+0.04</sup> <sub>-0.04</sub> (23.0 <sup>+1.0</sup> <sub>-1.0</sub> ) | 1.69 <sup>+0.06</sup> <sub>-0.06</sub> (43.0 <sup>+1.5</sup> <sub>-1.5</sub> ) | 1.94 (55)                 |
| HHR300SCP <sup>3</sup> | SC             | 1.2                 | 3050                            | 2800          | 3000         | 1.2       | 0.91 <sup>+0.04</sup> <sub>-0.04</sub> (23.0 <sup>+1.0</sup> <sub>-1.0</sub> ) | 1.69 <sup>+0.06</sup> <sub>-0.06</sub> (43.0 <sup>+1.5</sup> <sub>-1.5</sub> ) | 2.01 (57)                 |
| HHR300CH <sup>1</sup>  | C              | 1.2                 | 3300                            | 3000          | 1500         | 2.4       | 1.02 <sup>+0.04</sup> <sub>-0.04</sub> (25.8 <sup>+1.0</sup> <sub>-1.0</sub> ) | 1.97 <sup>+0.06</sup> <sub>-0.06</sub> (50.0 <sup>+1.5</sup> <sub>-1.5</sub> ) | 2.82 (80)                 |

1. H Type: Improved low rate charge characteristics at higher temperatures. Ideal for back-up applications (with appropriate charge control circuitry).

2. Mainly for low drain, extended run time applications.

3. Mainly for high drain applications such as power tools.

4. For reference only.

5. After charging at 0.1It for 16 hours, discharging at 0.2It

Note: /B=extended positive terminal (button top).

\*Please consult Panasonic for details of dT/dt

# Lithium Rechargeable Coin Batteries

VANADIUM RECHARGEABLE LITHIUM BATTERIES (VL SERIES)

MANGANESE RECHARGEABLE LITHIUM BATTERIES (ML SERIES)

## GENERAL DESCRIPTION

Panasonic vanadium rechargeable lithium batteries are compact, high energy secondary batteries that have nearly twice the energy of conventional button-shaped Ni-Cd batteries.

## FEATURES

- One high-voltage battery can serve your back-up needs
- Months of continuous use as a back-up
- Superior reliability; withstands overcharging and overdischarging



## VL COIN CELLS

| Model Number | Electrical Characteristics 20°C (68°F) |                         | Recommended Drain | Dimensions (Max.)  |                  |                |
|--------------|----------------------------------------|-------------------------|-------------------|--------------------|------------------|----------------|
|              | Nominal Voltage (V)                    | *Nominal Capacity (mAh) |                   | Diameter inch (mm) | Height inch (mm) | Weight oz. (g) |
| VL621        | 3.0                                    | 1.5                     | 0.01              | 0.27(6.8)          | 0.08(2.1)        | 0.01(0.3)      |
| VL1220       | 3.0                                    | 7.0                     | 0.03              | 0.49(12.5)         | 0.08(2.0)        | 0.03(0.8)      |
| VL2020       | 3.0                                    | 20.0                    | 0.07              | 0.79(20.0)         | 0.08(2.0)        | 0.07(2.2)      |
| VL2320       | 3.0                                    | 30.0                    | 0.10              | 0.91(23.0)         | 0.08(2.0)        | 0.09(2.7)      |
| VL2330       | 3.0                                    | 50.0                    | 0.10              | 0.91(23.0)         | 0.12(3.0)        | 0.12(3.5)      |
| VL3032       | 3.0                                    | 100.0                   | 0.20              | 1.18(30.0)         | 0.13(3.2)        | 0.22(6.2)      |

\* Nominal capacity is based on a standard drain and cut off voltage down to 2.5V at 20°C (68°F).

## APPLICATIONS

- RTC backup
- Memory cards
- Personal computers
- Sequencers
- Telephones
- Tuners
- Video cameras

## GENERAL DESCRIPTION

These super compact lithium secondary batteries feature a new configuration in which a manganese compound oxide is used for the positive electrode, and a lithium/aluminum alloy for the electrode.

## FEATURES

- Charge at voltage levels under 3V
- Large capacity for hour-after-hour back-up
- Excellent withstand voltage, overcharge and overdischarge withstanding characteristics



## ML COIN CELLS

| Model Number       | Electrical Characteristics 20°C (68°F) |                         | Recommended Drain | Dimensions (Max.)  |                  |                |
|--------------------|----------------------------------------|-------------------------|-------------------|--------------------|------------------|----------------|
|                    | Nominal Voltage (V)                    | *Nominal Capacity (mAh) |                   | Diameter inch (mm) | Height inch (mm) | Weight oz. (g) |
| ML414 <sup>1</sup> | 3.0                                    | 1.2                     | 0.005             | 0.19(4.8)          | 0.06(1.4)        | 0.003(0.09)    |
| ML421              | 3.0                                    | 2.3                     | 0.005             | 0.19(4.8)          | 0.08(2.1)        | 0.004(0.11)    |
| ML614 <sup>1</sup> | 3.0                                    | 3.4                     | 0.01              | 0.27(6.8)          | 0.06(1.4)        | 0.006(0.16)    |
| ML621 <sup>1</sup> | 3.0                                    | 5.0                     | 0.01              | 0.27(6.8)          | 0.08(2.1)        | 0.008(0.23)    |
| ML920              | 3.0                                    | 11.0                    | 0.03              | 0.37(9.5)          | 0.08(2.0)        | 0.014(0.4)     |
| ML1220             | 3.0                                    | 17.0                    | 0.03              | 0.49(12.5)         | 0.08(2.0)        | 0.03(0.8)      |
| ML2020             | 3.0                                    | 45.0                    | 0.12              | 0.79(20.0)         | 0.08(2.0)        | 0.078(2.2)     |

\* Nominal capacity shown is based on standard drain and cut off voltage down to 2.0V at 20°C (68°F)

<sup>1</sup> Available as a bare cell.

## APPLICATIONS

Power source for backing up memory data in:

- Mobile telephones
- Memory cards
- Other small-size communications devices

# Lithium Rechargeable Coin Batteries

## COIN CELL TAB CONFIGURATIONS

| Model Number | Tab Type             |                         | Configuration Type |
|--------------|----------------------|-------------------------|--------------------|
|              | With Insulation Wrap | Without Insulation Wrap |                    |
| VL TYPE      |                      |                         |                    |
| VL621        |                      | /DN                     | F                  |
| VL1220       | /HFN                 |                         | H                  |
| VL1220       | /VCN                 |                         | V                  |
| VL1220       | /FCN                 |                         | F                  |
| VL2020       | /VCN                 |                         | V                  |
| VL2020       | /HFN                 |                         | H                  |
| VL2320       | /VCN                 |                         | V                  |
| VL2320       | /HFN                 |                         | H                  |
| VL2320       | /F2N                 |                         | F                  |
| VL2330       | /VCN                 |                         | V                  |
| VL2330       | /HFN                 |                         | H                  |
| VL2330       | /F3N                 |                         | F                  |
| VL3032       | /GUFN                |                         | G                  |
| VL3032       | /F2N                 |                         | F                  |


| Model Number       | Tab Type                                                       |                         | Configuration Type |
|--------------------|----------------------------------------------------------------|-------------------------|--------------------|
|                    | With Insulation Wrap                                           | Without Insulation Wrap |                    |
| ML TYPE            |                                                                |                         |                    |
| ML414 <sup>1</sup> |                                                                | ML-414S/DN              | F                  |
| ML421              | Contact Panasonic for details on available tab configurations. |                         |                    |
| ML614 <sup>1</sup> |                                                                | ML-614S/FN              | F                  |
| ML621 <sup>1</sup> |                                                                | ML-621S/DN              | F                  |
| ML920              |                                                                | ML-920S/DN              | F                  |
| ML1220             | F1AN                                                           |                         | F                  |
| ML1220             | V1AN                                                           |                         | V                  |
| ML2020             | G1AN                                                           |                         | G                  |
| ML2020             | H1CN                                                           |                         | H                  |
| ML2020             | V1AN                                                           |                         | V                  |

<sup>1</sup> Also available as a bare cell.


Note: Please refer to the Panasonic website for exact tab dimensions.

Please contact Panasonic for requests on custom tab configurations.  
Minimum order requirements may apply.


### TYPICAL TAB CONFIGURATIONS




H Type




G Type



F Type



V Type



T Type

4

# Lithium Primary Coin Batteries

POLY-CARBONMONOFLUORIDE LITHIUM BATTERIES (BR SERIES)

MANGANESE DIOXIDE LITHIUM BATTERIES (CR SERIES)

## GENERAL DESCRIPTION

Panasonic coin type lithium batteries are high energy, high reliability batteries for a variety of applications. The full 3 volts in these high energy batteries is about twice that of conventional dry batteries. Panasonic coin type lithium batteries are available in two types: poly-carbon-monofluoride lithium batteries (BR Series) for users requiring extended reliability and safety, and manganese dioxide lithium batteries (CR Series) for users requiring high voltage and strong load pulse characteristics.

## FEATURES

- High voltage of 3 volts — twice that of conventional batteries
- Extremely small self-discharge for long service and shelf life
- Compact and lightweight, with extremely high energy density per unit weight
- Extremely safe (poly-carbon monofluoride lithium batteries)
- Extremely strong load pulse characteristics (manganese dioxide lithium)

## APPLICATIONS

- Calculators
- Cameras
- Compact, low power consuming cordless appliances
- Electronic watches (digital and analog)
- Memory backup in all type of devices (with tab terminals)

Operating Temperature BR Type: -30°C ~ 80°C

Operating Temperature CR Type: -30°C ~ 60°C

## COIN TYPE



## BR COIN CELLS

| Model Number | Electrical Characteristics (20°C) |        |                     |                        | Recommended Drain<br>Continuous (mA) | Dimensions (Max.)  |                  |                |
|--------------|-----------------------------------|--------|---------------------|------------------------|--------------------------------------|--------------------|------------------|----------------|
|              | JIS                               | IEC    | Nominal Voltage (V) | Nominal Capacity (mAh) |                                      | Diameter inch (mm) | Height inch (mm) | Weight oz. (g) |
| BR1220       | —                                 | —      | 3                   | 35                     | 0.03                                 | 0.49 (12.5)        | 0.08 (2.00)      | 0.02 (0.7)     |
| BR1225       | —                                 | BR1225 | 3                   | 48                     | 0.03                                 | 0.49 (12.5)        | 0.10 (2.50)      | 0.03 (0.8)     |
| BR1632       | —                                 | —      | 3                   | 120                    | 0.03                                 | 0.63 (16.0)        | 0.13 (3.20)      | 0.05 (1.5)     |
| BR2032       | —                                 | —      | 3                   | 190                    | 0.03                                 | 0.79 (20.0)        | 0.13 (3.20)      | 0.09 (2.5)     |
| BR2325       | —                                 | BR2325 | 3                   | 165                    | 0.03                                 | 0.91 (23.0)        | 0.10 (2.50)      | 0.11 (3.2)     |
| BR2330       | —                                 | —      | 3                   | 255                    | 0.03                                 | 0.91 (23.0)        | 0.12 (3.00)      | 0.11 (3.2)     |
| BR3032       | —                                 | BR3032 | 3                   | 500                    | 0.03                                 | 1.18 (30.0)        | 0.13 (3.20)      | 0.19 (5.5)     |

\*Nominal capacity shown is based on standard drain and cut off voltage down to 2.0V at 20°C (68°F)

## BR COIN CELL TAB CONFIGURATIONS

| Model Number | Tab Type             |                         | Configuration Type | Model Number | Tab Type             |                         | Configuration Type |
|--------------|----------------------|-------------------------|--------------------|--------------|----------------------|-------------------------|--------------------|
|              | With Insulation Wrap | Without Insulation Wrap |                    |              | With Insulation Wrap | Without Insulation Wrap |                    |
| BR1220       | /HFN                 |                         | H                  | BR2325       | /HCN                 | /HBN                    | H                  |
| BR1220       | /VCN                 |                         | V                  | BR2325       | /VCN                 |                         | V                  |
| BR1225       | /HCN                 | /HBN                    | H                  | BR2325       |                      | /HGN                    | H                  |
| BR1225       | /VCN                 |                         | V                  | BR2325       | /2HCN                |                         | H                  |
| BR1632       | /HFN                 |                         | H                  | BR2325       |                      | /VGN                    | V                  |
| BR2032       |                      | /HGN                    | G                  | BR2330       | /HFN                 | /HEN                    | H                  |
| BR2032       | /GUFN                | /GUN                    | G                  | BR2330       | /GUFN                | /GUN                    | G                  |
| BR2032       | /HFN                 | /HEN                    | H                  | BR2330       | /VCN                 | /VBN                    | V                  |
| BR2032       |                      | /VBN                    | V                  | BR2330       | /GVFN                | /GVN                    | V                  |
| BR2032       | /GVFN                | /GVN                    | V                  | BR2330       | /F3N                 |                         | F                  |
| BR2032       | /F2N                 |                         | F                  | BR3032       | /VCN                 |                         | V                  |
|              |                      |                         |                    | BR3032       | /F2N                 |                         | F                  |

# Lithium Primary Coin Batteries

| CR COIN CELL |                                   |        |                     |                        |                   |                    |                  |               |
|--------------|-----------------------------------|--------|---------------------|------------------------|-------------------|--------------------|------------------|---------------|
| Model Number | Electrical Characteristics (20°C) |        |                     |                        | Recommended Drain | Dimensions (Max.)  |                  |               |
|              | JIS                               | IEC    | Nominal Voltage (V) | Nominal Capacity (mAh) | Continuous (mA)   | Diameter inch (mm) | Height inch (mm) | Weight oz (g) |
| CR1025       | CR1025                            | CR1025 | 3                   | 30                     | 0.1               | 0.39 (10.0)        | 0.10 (2.5)       | 0.02 (0.7)    |
| CR1216       | CR1216                            | CR1216 | 3                   | 25                     | 0.1               | 0.49 (12.5)        | 0.06 (1.6)       | 0.02 (0.7)    |
| CR1220       | CR1220                            | CR1220 | 3                   | 35                     | 0.1               | 0.49 (12.5)        | 0.08 (2.0)       | 0.04 (1.2)    |
| CR1612       | —                                 | —      | 3                   | 40                     | 0.1               | 0.63 (16.0)        | 0.05 (1.2)       | 0.03 (0.8)    |
| CR1616       | CR1616                            | CR1616 | 3                   | 55                     | 0.1               | 0.63 (16.0)        | 0.06 (1.6)       | 0.04 (1.2)    |
| CR1620       | CR1620                            | CR1620 | 3                   | 75                     | 0.1               | 0.63 (16.0)        | 0.08 (2.0)       | 0.05 (1.3)    |
| CR1632       | —                                 | —      | 3                   | 140                    | 0.1               | 0.63 (16.0)        | 0.13 (3.2)       | 0.06 (1.8)    |
| CR2012       | CR2012                            | —      | 3                   | 55                     | 0.1               | 0.79 (20.0)        | 0.05 (1.2)       | 0.05 (1.4)    |
| CR2016       | CR2016                            | CR2016 | 3                   | 90                     | 0.1               | 0.79 (20.0)        | 0.06 (1.6)       | 0.06 (1.6)    |
| CR2025       | CR2025                            | CR2025 | 3                   | 165                    | 0.2               | 0.79 (20.0)        | 0.10 (2.5)       | 0.08 (2.3)    |
| CR2032       | CR2032                            | CR2032 | 3                   | 225                    | 0.2               | 0.79 (20.0)        | 0.13 (3.2)       | 0.10 (2.9)    |
| CR2330       | CR2330                            | CR2330 | 3                   | 265                    | 0.2               | 0.91 (23.0)        | 0.12 (3.0)       | 0.13 (3.8)    |
| CR2354       | CR2354                            | CR2354 | 3                   | 560                    | 0.2               | 0.91 (23.0)        | 0.21 (5.4)       | 0.20 (5.8)    |
| CR2412       | —                                 | —      | 3                   | 100                    | 0.2               | 0.96 (24.5)        | 0.05 (1.2)       | 0.07 (2.0)    |
| CR2450       | CR2450                            | CR2450 | 3                   | 620                    | 0.2               | 0.96 (24.5)        | 0.2 (5.0)        | 0.20 (6.3)    |
| CR2477       | —                                 | —      | 3                   | 1000                   | 0.2               | 0.96 (24.5)        | 0.30 (7.7)       | 0.37 (10.5)   |
| CR3032       | CR3032                            | CR3032 | 3                   | 500                    | 0.2               | 1.18 (30.0)        | 0.13 (3.2)       | 0.24 (6.8)    |

\*Nominal capacity shown is based on standard drain and cut off voltage down to 2.0V at 20°C (68°F)

| CR COIN CELL TAB CONFIGURATIONS |                      |                         |                    |  |              |                      |                         |                    |
|---------------------------------|----------------------|-------------------------|--------------------|--|--------------|----------------------|-------------------------|--------------------|
| Model Number                    | Tab Type             |                         | Configuration Type |  | Model Number | Tab Type             |                         | Configuration Type |
|                                 | With Insulation Wrap | Without Insulation Wrap |                    |  |              | With Insulation Wrap | Without Insulation Wrap |                    |
| CR1220                          | /HFN                 |                         | H                  |  | CR2330       | /GUFN                | /GUN                    | G                  |
| CR1220                          | /VCN                 |                         | V                  |  | CR2330       | /HFN                 |                         | H                  |
| CR1616                          |                      | /F2N                    | F                  |  | CR2330       | /GVFN                | /GVN                    | V                  |
| CR1632                          | /HFN                 |                         | H                  |  | CR2330       | /F3N                 |                         | F                  |
| CR2016                          | /F2N                 |                         | F                  |  | CR2354       | /HFN                 | /HEN                    | H                  |
| CR2032                          |                      | /HU3N                   | H                  |  | CR2354       | /GUFN                | /GUN                    | G                  |
| CR2032                          |                      | /HGN                    | G                  |  | CR2354       | /VCN                 |                         | V                  |
| CR2032                          | /HSN                 |                         | H                  |  | CR2450       | /H1AN                |                         | H                  |
| CR2032                          | /GUFN                | /GUN                    | G                  |  | CR2450       |                      | /G1AN                   | G                  |
| CR2032                          | /HFN                 | /HEN                    | H                  |  | CR2477       | /VCN                 |                         | V                  |
| CR2032                          |                      | /VBN                    | V                  |  | CR2477       | /HFN                 |                         | H                  |
| CR2032                          | /GVFN                | /GVN                    | V                  |  | CR3032       | /VCN                 |                         | V                  |
| CR2032                          | /F4N                 |                         | F                  |  | CR3032       | /F2N                 |                         | F                  |
| CR2032                          | /F2N                 |                         | F                  |  |              |                      |                         |                    |

# Lithium Primary Coin Batteries

## HIGH OPERATING TEMPERATURE POLY-CARBONMONOFLUORIDE LITHIUM BATTERIES (BR "A" SERIES)

### GENERAL DESCRIPTION

Panasonic's coin type high temperature batteries are high energy, high reliability batteries for applications that require a wider operating temperature range. The full 3 volts in these high energy batteries is about twice that of conventional dry batteries.

### FEATURES

- Wide operational temperature range
- Good storage stability
- Constant operating voltage
- Available with Tab terminals for PCB mounting

### APPLICATIONS

- Automotive electronic systems
- Tollway transponders
- RFID



| HIGH TEMPERATURE BR COIN CELL |                     |                        |                                   |                    |                  |               |                |
|-------------------------------|---------------------|------------------------|-----------------------------------|--------------------|------------------|---------------|----------------|
| Model Number                  | Nominal Voltage (V) | Nominal Capacity (mAh) | Recommended Drain Continuous (mA) | Dimensions (max)   |                  | Weight oz (g) | Temp. Range °C |
|                               |                     |                        |                                   | Diameter inch (mm) | Height inch (mm) |               |                |
| BR1225A                       | 3                   | 48                     | 0.03                              | 0.49 (12.5)        | 0.10 (2.5)       | 0.03 (0.8)    | -40° C~125° C  |
| BR1632A                       | 3                   | 120                    | 0.03                              | 0.63 (16.0)        | 0.13 (3.2)       | 0.05 (1.5)    | -40° C~125° C  |
| BR2330A                       | 3                   | 255                    | 0.03                              | 0.91 (23.0)        | 0.12 (3.0)       | 0.11 (3.2)    | -40° C~125° C  |
| BR2450A                       | 3                   | 550                    | 0.03                              | 0.96 (24.5)        | 0.20 (5.0)       | 0.21 (5.0)    | -40° C~125° C  |
| BR2477A                       | 3                   | 1000                   | 0.03                              | 0.96 (24.5)        | 0.30 (7.7)       | 0.28 (8.0)    | -40° C~125° C  |

Nominal capacity shown is based on standard drain and cut off voltage down to 2.0V at 20°C (68°F)

| HIGH TEMPERATURE BR COIN CELL<br>TAB CONFIGURATIONS |                      |                         |                    |
|-----------------------------------------------------|----------------------|-------------------------|--------------------|
| Model Number                                        | Tab Type             |                         | Configuration Type |
|                                                     | With Insulation Wrap | Without Insulation Wrap |                    |
| BR1225A                                             | /FAN                 |                         | F                  |
| BR1225A                                             | /HBN                 | /HAN                    | H                  |
| BR1632A                                             | /FAN                 |                         | F                  |
| BR1632A                                             |                      | /GAN                    | G                  |
| BR1632A                                             | /HAN                 | /HBN                    | H                  |
| BR1632A                                             | /VAN                 |                         | V                  |
| BR2330A                                             | /FAN                 |                         | F                  |
| BR2330A                                             |                      | /GAN                    | G                  |
| BR2330A                                             | /HDN                 |                         | H                  |
| BR2330A                                             | /VAN                 |                         | V                  |
| BR2450A                                             | /FAN                 |                         | F                  |
| BR2450A                                             | /GAN                 |                         | G                  |
| BR2477A                                             | /FBN                 |                         | F                  |
| BR2477A                                             | /GAN                 |                         | G                  |
| BR2477A                                             | /HBN                 | /HCN                    | H                  |
| BR2477A                                             | /VAN                 |                         | V                  |

Note: Please refer to the Panasonic website for exact tab dimensions.

Please contact Panasonic for requests on custom tab configurations. Minimum order requirements may apply.

# Lithium Primary Cylindrical Batteries

## POLY-CARBONMONOFLUORIDE LITHIUM BATTERIES (BR SERIES)



### GENERAL DESCRIPTION

Panasonic cylindrical lithium batteries are known for their high voltage, energy density, durability, and stable operation.

### FEATURES

- High energy density
- Long shelf life
- Stable operation
- High rate discharge
- Strong leakage resistance
- Excellent durability









### APPLICATIONS

- Cameras
- Memory back-up
- Utility meters
- Emergency signal light
- Electric locks
- Electronic measurement equipment

### BR CYLINDRICAL CELLS

| Model Number | Electrical Characteristics |                          |                     | Dimensions         |                  | Approximate Weight oz. (g) | Operating Temperature (°C) |
|--------------|----------------------------|--------------------------|---------------------|--------------------|------------------|----------------------------|----------------------------|
|              | Nominal Voltage (V)        | **Nominal Capacity (mAh) | Standard Drain (mA) | Diameter inch (mm) | Height inch (mm) |                            |                            |
| BR-C         | 3                          | 5,000                    | 5.0                 | 1.02 (26.0)        | 1.99 (50.5)      | 1.48 (42.0)                | - 40 to +85                |
| BR-A         | 3                          | 1,800                    | 2.5                 | 0.67 (17.0)        | 1.79 (45.5)      | 0.63 (18.0)                | - 40 to +85                |
| BR-AG*       | 3                          | 2,200                    | 2.5                 | 0.67 (17.0)        | 1.79 (45.5)      | 0.63 (18.0)                | - 40 to +85                |
| BR-2/3A      | 3                          | 1,200                    | 2.5                 | 0.67 (17.0)        | 1.32 (33.5)      | 0.48 (13.5)                | - 40 to +85                |
| BR-2/3AG*    | 3                          | 1,450                    | 2.5                 | 0.67 (17.0)        | 1.32 (33.5)      | 0.48 (13.5)                | - 40 to +85                |
| BR-1/2AA     | 3                          | 1,000                    | 2.5                 | 0.57 (14.5)        | 1.00 (25.5)      | 0.28 (8.0)                 | - 40 to +100               |

Note: \* G Versions are higher capacity. \*\* Nominal capacity is based on standard drain and cut off voltage down to 2.0V at 20°C (68°F)

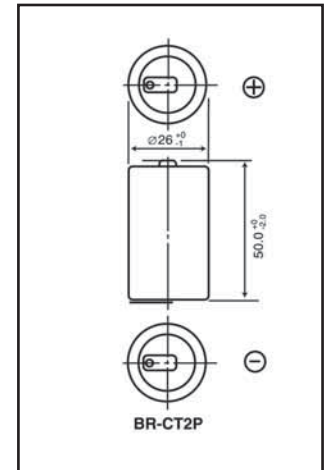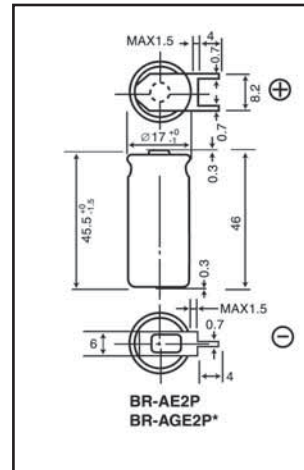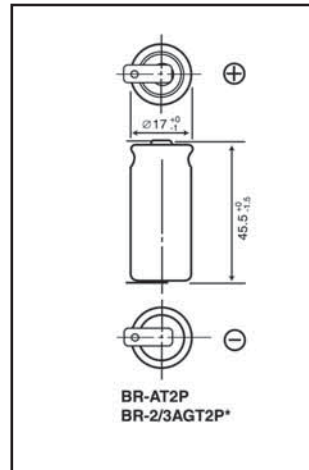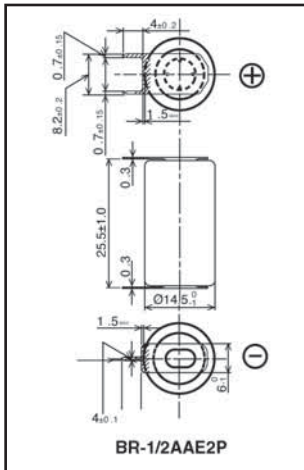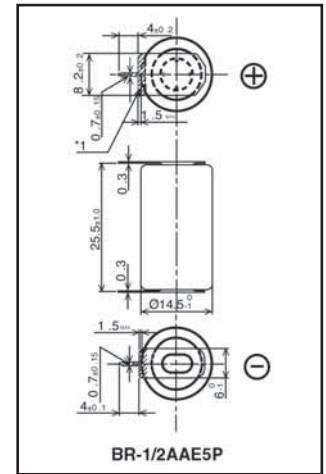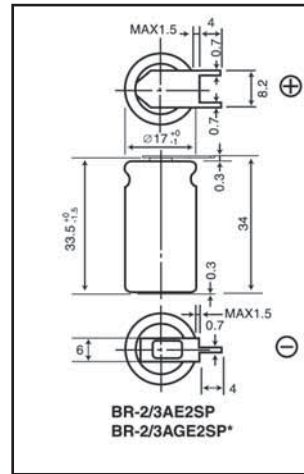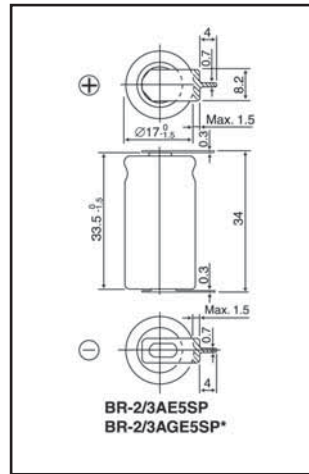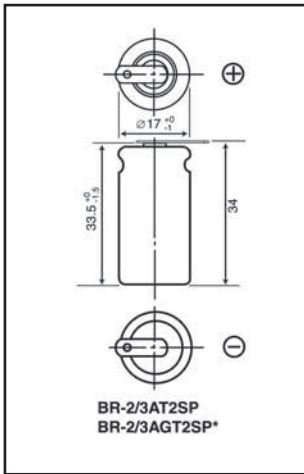

# Lithium Primary Cylindrical Batteries

## MANGANESE DIOXIDE LITHIUM BATTERIES (CR SERIES) (USER REPLACEABLE)



### GENERAL DESCRIPTION

Developed by Panasonic, packaged user replaceable lithium batteries offer high voltage and high energy density. Ideal for designs requiring batteries with retail availability to allow for convenient end user replacement.

### FEATURES

- High safety and reliability
- High current pulse discharge capability
- Rapid discharge for strobes is possible at 6V
- Superior shelf life/minimal self-discharge
- Operating temperature (-40°C~70°C)
- High energy density

### CR CYLINDRICAL CELLS

| Model Number | Voltage (V) | Nominal Capacity (mAh) | Continuous Drain (mA) | Dimensions inch (mm)                | Weight oz. (g) |
|--------------|-------------|------------------------|-----------------------|-------------------------------------|----------------|
| CR123A       | 3           | 1,550*                 | 20                    | 0.67 x 1.36 (17.0 x 34.5)           | 0.60 (17)      |
| CR2          | 3           | 850*                   | 20                    | 0.61 x 1.56 (15.6 x 27.0)           | 0.39 (11)      |
| 2CR5         | 6           | 1,400**                | 20                    | 0.67 x 1.34 x 1.79 (17 x 34 x 45)   | 1.34 (38)      |
| CR-P2        | 6           | 1,400**                | 20                    | 0.77 x 1.38 x 1.42 (19.5 x 35 x 36) | 1.31 (37)      |
| CR-V3P       | 3           | 3,300*                 | 20                    | 1.03 x 0.51 x 1.84 (29 x 14.5 x 52) | 1.38 (39)      |

\* Based on standard drain and cut off voltage down to 2.0 V at 20°C (68°F) \*\* Based on standard drain and cut off voltage down to 4.0 V at 20°C (68°F)

### APPLICATIONS

- Cameras
- Memory back-up over a wide range of applications
- Other applications where ease of replacement is required

# Lithium Primary Pin Batteries

## MANGANESE DIOXIDE LITHIUM BATTERIES (CR SERIES) FOR INDUSTRIAL APPLICATIONS



### CR CYLINDRICAL CELLS

| Model Number | Voltage (V) | Nom. Capacity (mAh) | Dimensions inch (mm)      | Weight oz. (g) |
|--------------|-------------|---------------------|---------------------------|----------------|
| CR-2/3AZ     | 3           | 1,600               | 0.67 x 1.32 (17.0 x 33.5) | 0.60 (17)      |
| CR-AG        | 3           | 2400                | 0.67 x 1.79 (17.0 x 45.5) | 0.78           |

### GENERAL DESCRIPTION

The Industrial Appliance CR Series featuring superior high-rate and extended-use performance. Internal resistance remains low during long term discharge such as memory-back-up. "Wake-up-pulse discharge" not required for high current pulse discharge.

### FEATURES

- Superior Long Term Reliability
- High current pulse discharge capability
- Operating Temperature (-40 ~70 °C)
- High safety and energy density

### APPLICATIONS

- Meter, AMR (Automatic Meter Reading)
- Fire Alarm (Smoke Detector)
- Home Security Device
- ETC (Electric toll collection)

## POLY-CARBONMONOFLUORIDE LITHIUM BATTERIES (BR SERIES)

### GENERAL DESCRIPTION

Panasonic carbon monofluoride pin type lithium batteries are slim and lightweight through the use of an aluminum case. This unique design, developed first by Panasonic, combines the best of battery technologies.

### FEATURES

- Compact and lightweight
- 2x the voltage of conventional dry batteries
- Operating temperature (-30°C~+60°C)
- Pin terminal for easy connection

### APPLICATIONS

- Fishing pole tip lights
- LED illumination
- LED night fishing floats
- Microphones

### BR PIN CELLS

| Model Number | Electrical Characteristics |                              |                   |                  | Dimensions            |                     | Weight<br>oz (g) |
|--------------|----------------------------|------------------------------|-------------------|------------------|-----------------------|---------------------|------------------|
|              | Nominal<br>Voltage         | Nominal<br>Capacity<br>(mAh) | Recommended Drain |                  | Diameter<br>Inch (mm) | Height<br>Inch (mm) |                  |
|              |                            |                              | Pulse<br>(mA)     | Standard<br>(mA) |                       |                     |                  |
| BR425        | 3                          | 25                           | 4                 | 0.5              | 0.17 (4.2)            | 1.02 (25.9)         | 0.02 (0.6)       |
| BR435        | 3                          | 50                           | 6                 | 1.0              | 0.17 (4.2)            | 1.41 (35.9)         | 0.03 (0.9)       |



Nominal capacity is based on standard drain and cut off voltage down to 2.0V at 20°C (68°F)

# Valve Regulated Lead Acid Batteries



## FEATURES

- High quality and reliability
- Exceptional deep discharge recovery
- No corrosive gas generation
- Long service life
- Quick chargeability
- High power density
- Maintenance-free operation

## APPLICATIONS

- UPS (uninterruptible power supplies)
- Emergency lighting
- Wheelchairs
- Telecom back-up power supplies
- Lawn and garden tools
- Engine starters
- Energy storage

## GENERAL DESCRIPTION

Panasonic's tough valve regulated lead acid (VRLA) rechargeable batteries are designed to provide outstanding performance in withstanding overcharge, overdischarge, and resisting vibration and shock. These compact batteries save installation space while providing full and reliable power. The use of special sealing epoxies, tongue and groove case construction, long-sealing paths for posts and connectors assures that the battery will offer exceptional leak resistance.

Panasonic VRLA batteries utilize pasted lead-calcium plates with the electrolyte in the battery held captive in an Absorbent Glass Mat (AGM) separator located between the plates that immobilizes the electrolyte in the cell. AGM separator material is a highly porous, absorbent micro fiberglass mat mixed with polymer fibers that immobilizes the electrolyte and creates a situation where a spill of electrolyte is highly unlikely.

Panasonic Valve Regulated Lead Acid batteries (weighing less than 2 lbs) are covered by the Rechargeable Battery Recycling Corporation's (RBRC) recycling program. For larger batteries call 1-800-SAV-LEAD.



| BACK-UP AND MAIN POWER SUPPLIES (CYCLE AND TRICKLE USE) |                     |                                   |                              |             |            |              |                        |                |                    |         |
|---------------------------------------------------------|---------------------|-----------------------------------|------------------------------|-------------|------------|--------------|------------------------|----------------|--------------------|---------|
| Model Number*                                           | Nominal Voltage (V) | Rated capacity 20 hours rate (Ah) | Outline dimensions inch (mm) |             |            |              | Wt. (Approx.) lbs (kg) | Terminal Types | Battery-case resin |         |
|                                                         |                     |                                   | Length                       | Width       | Height     | Total height |                        |                | UL94HB             | UL94V-0 |
| LC-R061R3P                                              | 6                   | 1.3                               | 3.82 (97)                    | 0.95 (24)   | 1.97 (50)  | 2.17 (55)    | 0.66 (0.30)            | B              | ○                  |         |
| LC-R063R4P                                              | 6                   | 3.4                               | 5.28 (134)                   | 1.34 (34)   | 2.36 (60)  | 2.6 (66)     | 1.37 (0.62)            | B              | ○                  |         |
| LC-R064R5P                                              | 6                   | 4.5                               | 2.76 (70)                    | 1.89 (48)   | 4.02 (102) | 4.26 (108)   | 1.72 (0.78)            | B              | ○                  |         |
| LC-R067R2P(a)                                           | 6                   | 7.2                               | 5.95 (151)                   | 1.34 (34)   | 3.70 (94)  | 3.94 (100)   | 2.78 (1.26)            | B/C            | ○                  |         |
| LC-R0612P(a)                                            | 6                   | 12.0                              | 5.95 (151)                   | 1.97 (50)   | 3.70 (94)  | 3.94 (100)   | 4.30 (1.95)            | B/C            | ○                  |         |
| LC-R121R3P                                              | 12                  | 1.3                               | 3.82 (97)                    | 1.87 (48)   | 1.97 (50)  | 2.17 (55)    | 1.30 (0.59)            | B              | ○                  |         |
| LC-R122R2P                                              | 12                  | 2.2                               | 6.97 (177)                   | 1.34 (34)   | 2.36 (60)  | 2.6 (66)     | 1.76 (0.80)            | B              | ○                  |         |
| LC-R123R4P                                              | 12                  | 3.4                               | 5.28 (134)                   | 2.64 (67)   | 2.36 (60)  | 2.6 (66)     | 2.65 (1.20)            | B              | ○                  |         |
| LC-R127R2P(a)                                           | 12                  | 7.2                               | 5.95 (151)                   | 2.54 (64.5) | 3.70 (94)  | 3.94 (100)   | 5.45 (2.47)            | B/C            | ○                  |         |
| LC-RA1212P(a)                                           | 12                  | 12.0                              | 5.95 (151)                   | 3.86 (98)   | 3.70 (94)  | 3.94 (100)   | 8.36 (3.80)            | B/C            | ○                  |         |
| LC-RD1217P                                              | 12                  | 17.0                              | 7.13 (181)                   | 2.99 (76)   | 6.58 (167) | 6.58 (167)   | 14.34 (6.50)           | D              | ○                  |         |
| LC-R1233P                                               | 12                  | 33.0                              | 7.70 (195.6)                 | 5.12 (130)  | 6.10 (155) | 7.09 (180)   | 26.50 (12.0)           | E              | ○                  | ●       |

\* Previous model number is given in parentheses

(a) Add applicable codes for terminal type: P = faston 187, P1 = faston 250

Note: Battery cases marked with a (○) are the normal product using the standard resin.

Those marked with a solid circle (●) indicate specifications as per special order.

# Valve Regulated Lead Acid Batteries

## MAIN POWER SUPPLIES (CYCLE USE)

| Model Number | Nominal Voltage (V) | Rated capacity 20 hours rate (Ah) | Outline dimensions inch (mm) |            |            |              | Wt. (Approx.) lbs (kg) | Terminal Types | Battery-case resin |         |
|--------------|---------------------|-----------------------------------|------------------------------|------------|------------|--------------|------------------------|----------------|--------------------|---------|
|              |                     |                                   | Length                       | Width      | Height     | Total height |                        |                | UL94HB             | UL94V-0 |
| LC-XC1228AP  | 12                  | 28.0                              | 6.50 (165)                   | 4.92 (125) | 6.89 (175) | 7.07 (179.5) | 24.34 (11)             | G              | ○                  |         |

Note: Battery cases marked with an ○ are the normal product using the standard resin.  
Those marked with a solid circle (●) indicate specifications as per special order.

## BACK-UP POWER SUPPLIES (LONG LIFE TRICKLE USE \*)

| Model Number  | Nominal Voltage (V) | Rated capacity 20 hours rate (Ah) | Outline dimensions inch (mm) |             |            |              | Wt. (Approx.) lbs (kg) | Terminal Types | Battery-case resin |         |
|---------------|---------------------|-----------------------------------|------------------------------|-------------|------------|--------------|------------------------|----------------|--------------------|---------|
|               |                     |                                   | Length                       | Width       | Height     | Total height |                        |                | UL94HB             | UL94V-0 |
| LC-P067R2P(a) | 6                   | 7.2                               | 5.95 (151)                   | 1.34 (34)   | 3.70 (94)  | 3.94 (100)   | 2.87 (1.3)             | B/C            |                    |         |
| LC-P0612P(a)  | 6                   | 12.0                              | 5.95 (151)                   | 1.97 (50)   | 3.70 (94)  | 3.94 (100)   | 4.41 (2.0)             | B/C            |                    |         |
| LC-P127R2P(a) | 12                  | 7.2                               | 5.95 (151)                   | 2.54 (64.5) | 3.70 (94)  | 3.94 (100)   | 5.52 (2.5)             | B/C            |                    | ○       |
| LC-PD1217P    | 12                  | 17.0                              | 7.13 (181)                   | 2.99 (76)   | 6.58 (167) | 6.58 (167)   | 14.34 (6.5)            | D              | ●                  |         |
| LC-P1220P     | 12                  | 20.0                              | 7.13 (181)                   | 2.99 (76)   | 6.58 (167) | 6.58 (167)   | 14.6 (6.6)             | D              | ○                  |         |
| LC-P1220AP    | 12                  | 20.0                              | 7.13 (181)                   | 2.99 (76)   | 6.58 (167) | 6.58 (167)   | 14.6 (6.6)             | G              | ●                  |         |
| LC-P1228P     | 12                  | 28.0                              | 6.50 (165)                   | 4.92 (125)  | 6.89 (175) | 7.07 (179.5) | 24.3 (11)              | D              | ○                  |         |
| LC-P1228AP    | 12                  | 28.0                              | 6.50 (165)                   | 4.92 (125)  | 6.89 (175) | 6.89 (175)   | 24.3 (11)              | G              | ○                  | ●       |


(a) Add applicable codes for terminal type: P = faston 187, P1 = faston 250, P2 = 187/250  
Note: Battery cases marked with an ○ are the normal product using the standard resin.  
Those marked with a solid circle ● indicate specifications as per special order.

\*Expected trickle life approximately 6 years


## BACK-UP POWER (HIGH POWER SERIES)

| Model Number | Nominal Voltage (V) | Rated capacity Watts/Cell at 10 Minute Rate | Outline dimensions inch (mm) |             |           |              | Wt. (Approx.) lbs (kg) | Terminal Types | Battery-case resin |         |
|--------------|---------------------|---------------------------------------------|------------------------------|-------------|-----------|--------------|------------------------|----------------|--------------------|---------|
|              |                     |                                             | Length                       | Width       | Height    | Total height |                        |                | UL94HB             | UL94V-0 |
| UP-VW1220P1  | 12                  | 20                                          | 5.51 (140)                   | 1.52 (38.5) | 3.70 (94) | 4.00 (101.5) | 2.98 (1.35)            | C              | ○                  | ●       |
| UP-VW1245P1  | 12                  | 45                                          | 5.95 (151)                   | 2.54 (64.5) | 3.70 (94) | 4.00 (101.5) | 5.74 (2.6)             | C              | ○                  |         |
| UP-VW1228P1  | 12                  | 28                                          | 5.95 (151)                   | 2.54 (64.5) | 3.70 (94) | 4.00 (101.5) | 4.07 (1.85)            | C              |                    |         |
| UP-VW1236P1  | 12                  | 36                                          | 5.95 (151)                   | 2.54 (64.5) | 3.70 (94) | 4.00 (101.5) | 4.51 (2.05)            | C              |                    |         |


### TERMINAL TYPES:



(B) Faston type 187  
(C) Faston type 250  
Indicated by model # suffix:  
P=187  
P1=250  
P2=250(+)/187(-)



(D) M5 bolt and nut type  
(E) M6 bolt and nut type  
Indicated by model # suffix: P



(G) M5 threaded post type  
(H) M6 threaded post type  
Indicated by model # suffix: AP

## WIND TURBINE PITCH CONTROL

| Model Number | Nominal Voltage (V) | Rated capacity Watts/Cell at 10 Minute Rate | Outline dimensions inch (mm) |       |        |              | Wt. (Approx.) lbs | Terminal Types | Battery-case resin |         |
|--------------|---------------------|---------------------------------------------|------------------------------|-------|--------|--------------|-------------------|----------------|--------------------|---------|
|              |                     |                                             | Length                       | Width | Height | Total height |                   |                | UL94HB             | UL94V-0 |
| LC-WTV127R2  | 12                  | 7.2                                         | 5.95                         | 2.53  | 3.71   | 3.94         | 5.51              | NA             |                    | ●       |
| LC-WTV1212   | 12                  | 12                                          | 5.95                         | 3.86  | 3.71   | 3.94         | 8.49              | NA             |                    | ●       |
| LC-WTP127R2  | 12                  | 7.2                                         | 5.95                         | 2.53  | 3.71   | 3.94         | 5.51              | NA             |                    | ●       |
| LC-WTP1212   | 12                  | 12                                          | 5.95                         | 3.86  | 3.71   | 3.94         | 8.49              | NA             |                    | ●       |

# Alkaline Batteries

## GENERAL DESCRIPTION

Panasonic Industrial brand Alkalines are designed with a power reservoir that enables them to last longer. High current and large capacity are standard, which means high performance for our customers. Panasonic Industrial Alkaline batteries are made in the USA at our state-of-the-art manufacturing facility in Columbus, Georgia.

## FEATURES

- Heavy current and continuous drain
- Operates reliably in temperature range of -20°C to 54°C (40°F to 130°F)
- Individual date coded to guarantee freshness prior to use
- Up to 7 year shelf life when stored at 25°C/77°F 80% capacity (except 9V which are 5 year shelf life)
- EU compliant dustbin symbol
- Easier cross-referencing with IEC battery codes



## APPLICATIONS

- Portable stereos
- Radio-cassette recorders
- Strobos
- Cameras
- Electronic calculators
- Electric shavers
- High-powered flashlights
- Electric doorlocks
- Emergency lighting
- Toys and other cordless products
- Transportation
- Security
- Contractors
- HVAC

| INDUSTRIAL ALKALINE BATTERIES |      |     |                       |                     |                    |
|-------------------------------|------|-----|-----------------------|---------------------|--------------------|
| Model Number                  | Size | V   | Diameter<br>Inch (mm) | Height<br>Inch (mm) | Avg. Wt.<br>oz (g) |
| LR20XWA                       | D    | 1.5 | 1.312 (33.3)          | 2.407 (60.5)        | 4.97 (141.0)       |
| LR14XWA                       | C    | 1.5 | 1.004 (25.5)          | 1.969 (49.5)        | 2.47 (70.0)        |
| LR6XWA                        | AA   | 1.5 | .571 (14.50)          | 1.988 (50.0)        | 0.80 (23.0)        |
| LR03XWA                       | AAA  | 1.5 | .413 (10.20)          | 1.752 (44.10)       | 0.38 (11.0)        |

| Model Number  | V | L Inch (mm) | W Inch (mm) | D Inch (mm)   | Avg. Wt. oz (g) |
|---------------|---|-------------|-------------|---------------|-----------------|
| 6LR61XWA (9V) | 9 | 1.0 (47.5)  | 1.0 (25.50) | 0.649 (17.50) | 1.60 (45)       |


# Panasonic Industrial

Many products sold by Fortune 500 companies are in fact **Powered by Panasonic** technology, and we are proud to provide manufacturers with the **performance, quality, and reliability** that are synonymous with the Panasonic brand.

The Power of Panasonic Industrial brings strategic **innovations** to our customers' product development process. We provide the **technology and engineering resources** to enable manufacturers to plan and build **world-class solutions** to meet their **customer needs**.

Engineering and manufacturing power form the core of our company's **strength**, infusing our entire product line, from the smallest chip to giant HD displays. Prior to becoming a global consumer electronics powerhouse, Panasonic began its existence by developing **component and material technologies** that still serve as the **building blocks** for the wide range of advanced products for which our company is best known today, and this development continues.

Our technology is **deeply embedded** within our customers' products, so consumers may not realize that their refrigerator has at its heart a Panasonic compressor, their mobile device relies upon our components and batteries, their computer contains our DVD drive, or their television uses our display panels. Our measure of success is the **confidence and trust** shown in our technology when it becomes the power behind our customers' products.

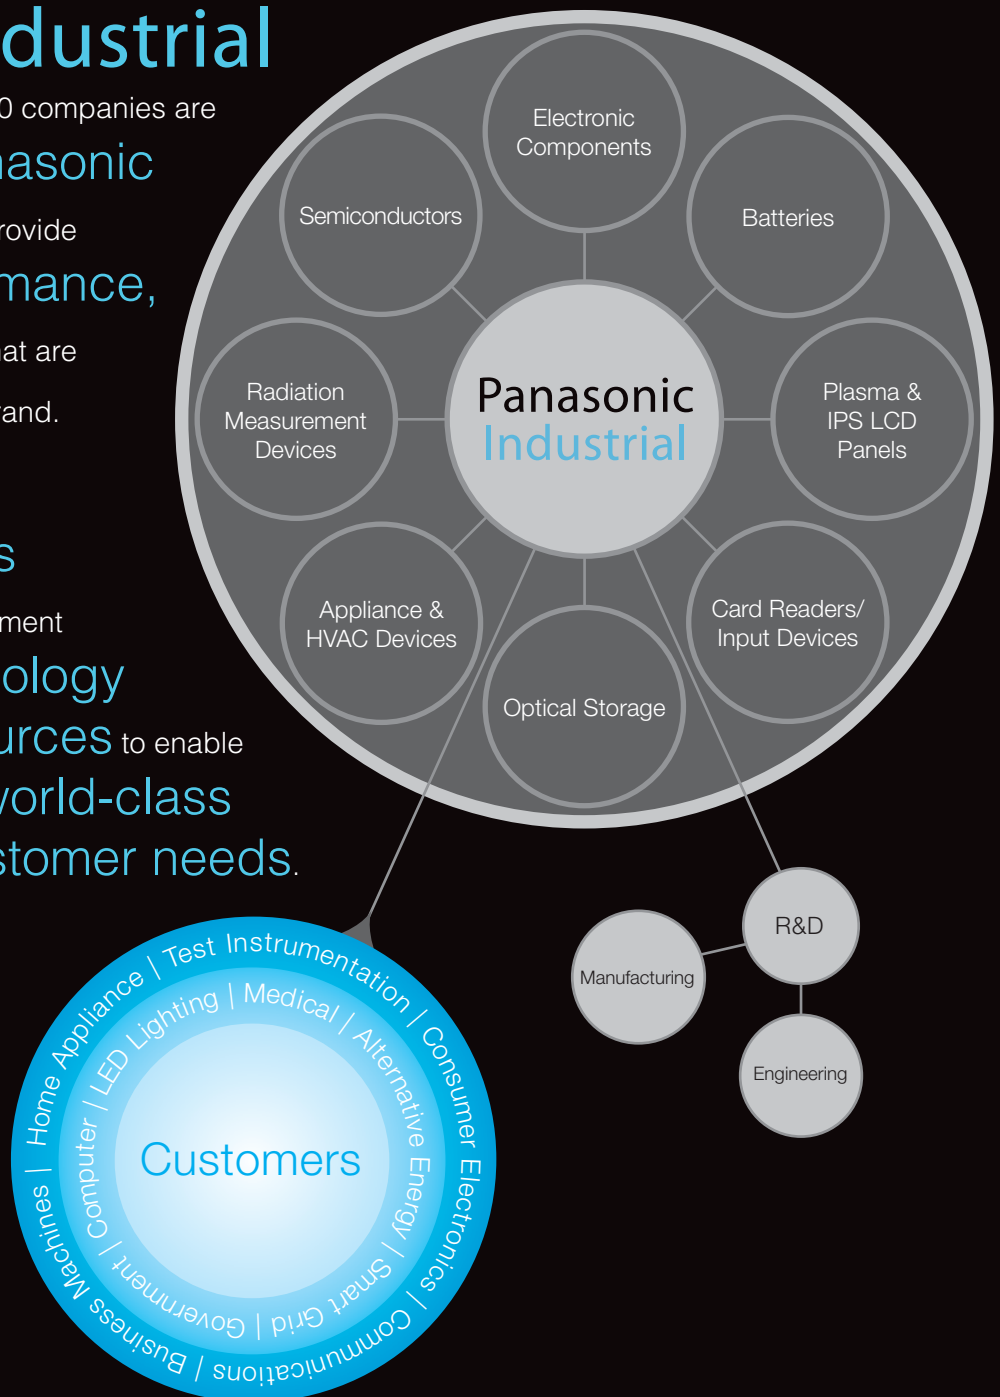



For more information on how Panasonic can assist you  
with your battery power solution needs call **877-726-2228**,  
visit **[www.panasonic.com/industrial/batteries-oem](http://www.panasonic.com/industrial/batteries-oem)**  
or e-mail **[oembatteries@us.panasonic.com](mailto:oembatteries@us.panasonic.com)**

**Panasonic ideas for life**

Panasonic Batteries 5201 Tollview Drive Rolling Meadows Illinois 60008

Copyright © 2011 Panasonic Corporation of North America. All Rights Reserved. PIC-PanBat-FY11-PanaEnergyCatalog