

承 認 書

Specification for approval

客戶名稱：
Customer _____

產品名稱：
Description: _____ DB-9P 公 传统焊线式 兰胶

客 戶 料 號：
Customer part no: _____

燦科盟產品編號：
CKM P/N: _____ DB0009PM000XH00

承 認 書 編 號：
Approval sheet NO.: _____ SA150431719

承 認 日 期：
Approval date: _____ 2017-11-17

客 戶 確 認 CUSTOMER APPROVED	核 准 APPROVED	審 核 ENGINEER	經 辦 CHECK
			刘力 2017/11/17

敬請蓋印承認規格之後，將一份交回給本公司，謝謝!

Please return 1sets of this form to confirm your approval of the product specification thank you!

深圳市燦科盟實業有限公司

工廠地址：深圳市光明樓村鲤鱼水工业區鑫博盛科技园 B 栋四樓




聯繫電話：0755-81488157 28154692 13316859588

傳 真：0755-83425987

Http://www.Ckmtw.com.cn

E-mail:2000@ckmtw.com.cn

業務負責人：_____

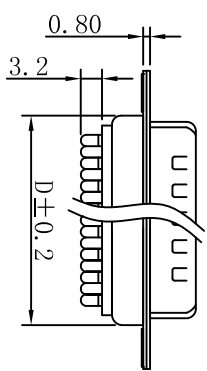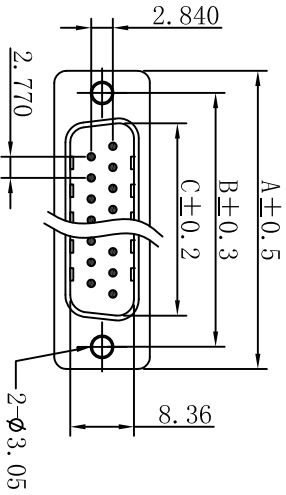

MATERIAL & FINISHES

- INSULATOR - PBT GLASS FILLED UL94V-0
- CONTACT- BRASS OR PHOSPHOR BRONZE
- SHELL - STEEL
- PLATING - CONTACT
SELECTIVE GOLD OVER NICKEL PLATED(CONTACT AREA)
TIN/LEAD OVER NICKEL PLATED(TAIL AREA)
- SHELL
TIN OR ZINC OVER COPPER PLATED

ELECTRICAL CHARACTERISTICS

- CURRENT RATING : 3A
- CONTACT RESISTANCE : 20mΩ MAX
- INSULATION RESISTANCE : 1000MΩ AC 500V
- DIELECTRIC VOLTAGE : 500V /MIN
- OPERATING TEMPERATURE : -55°C TO+105°C

POLES	PART No.	Dim. A	Dim. B	Dim. C	Dim. D
9	DB-9P	30.81	24.99	16.92	19.25
15	DB-15P	39.14	33.32	25.25	27.51
25	DB-25P	53.04	47.04	38.96	41.20
37	DB-37P	69.40	63.50	55.42	57.71

APPROVED:	DATE:	C 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD					
CHECKED:	DATE:	TITLE: DB-XP 公头 焊线 传统式					
DRAWN:	DATE:	P/N		/			
LYF	2009-11-28	UNIT	mm	SCALE	free	REV.	A
.000	±0.05	FILE NO.	Ckmtw-DB-0002			HX00	

深圳市灿科盟实业有限公司

DB SERIES

内容：此规格书包含 DB 接插件系列。

Scope: This specification covers the DB spacing Connector series.

Index:

	Page
1. 产品名称及料号/Product name and part number	2
2. 额定电压电流/Ratings	2
3. 特性测试/Performance	
3-1.电气特性/Electrical performance	2
3-1-1.接触阻抗/Contact resistance	2
3-1-2.绝缘阻抗/Insulation resistance	2
3-1-3.高压测试/Dielectric strength	2
3-2.机械特性/Mechanical performance	
3-2-1.整组插拔测试/Insertion force and withdrawal force	2
3-2-2.插入力/Insertion force	2
3-2-3.拔入力/withdrawal force	2
3-3.环境特性测试/Environmental performance and others	
3-3-1.整组插拔测试后接触阻抗/Repeated insertion/withdrawal	3
3-3-2.温升测试/Temperature rise	3
3-3-3.震动测试/Vibration	3
3-3-4.冲击测试/Shock	3
3-3-5.耐热测试/Heat resistance	3
3-3-6.低温测试/Cold resistance	3
3-3-7.恒温恒湿/Humidity	3
3-3-8.温度冲击测试/Temperature cycling	3
3-3-9.盐水喷雾测试/Salt spray	3
3-3-10.沾锡性测试/Solderability	4
3-3-11.焊热性测试/Resistance to soldering heat	4
3-3-12 寿命测试/Life Test	4
4. 产品规格尺寸及材质/Product shape, dimensions and materials	4

Note::以上测试视公司之测试条件/能力而定。

FILE NO	ENS014	APPROVAL	CHECK	DRAWING
ECR/N NO	New spec			

1. 产品名称及料号/Product name and part number

Product Name	Part Number
Name 名称	DMS-XP MALE DMS-XP FEMAEL

2. 额定电压电流及使用线径/Ratings and applicable wires

ITEM	STANDARD
Rated Voltage(Max) 额定电压（最高）	250V DC/AC(rms)
Rated Current(Max) 额定电流（最高）	3A
Ambient Temperature 使用温度范围	-50℃-+105℃

3. 特性测试/Performance

3-1.电气特性/Electrical performance

ITEM	Test condition	Requirement
3-1-1 Contact Resistance 接触阻抗	Mate connectors, reassure by dry circuit ,20mV MAX,10mv.(Based upon JIS C5402 5.4) 将公母对插，二头接上微电流电压测试。	0.02 欧（MAX）
3-1-2 Insulation resistance 绝缘阻抗	Mate connectors, apply 500V DC between adjacent terminal or ground. (Based upon JIS C5402 5.2/MIL-STD-202 method 302 condition B) 将公母对插，二头接上电压测试	1000 兆欧（MIN）
3-1-3 Dielectric strength 高压测试	Mate connectors, apply 500V AC for 1 minute between adjacent terminal or ground. (Based upon JIS C5402 5.1/MIL-ST-202 Method 301) 将公母对插，相邻的二支端子接上高压测试	No breakdown and flashover 没有损坏/没有电弧产生

3-2.机械特性/Mechanical performance

ITEM	Test condition	Requirement
3-2-1 Insertion force and withdrawal force 整组插拔测试	Insert and withdraw connectors at the speed rate of 25±3mm/minute 公母对插插拔 30 次，机器行走速度 25±3mm/分钟。	1.5 KgN（MIN）
3-2-1 Insertion force 插入力	Insert the crimped terminal into the connectors 将公头插入母座内，测试插入值	2.5Kg（MAX）
3-2-4 withdrawal force 拔入力	Apply axial pull out force at the speed rate of 25±3mm/minute on the terminal assembled In the housing. 将公头从母座中拔出，测试拔出值	1.0Kg (MIN)

3-3.环境特性测试/Environmental performance and others

ITEM		Test condition	Requirement	
3-3-1	Repeated insertion/ withdrawal	When mated up to 30 cycles repeatedly by the rate of 10 cycles per minute 三十次插拔后，测量接触阻抗	Contact Resistance 接触阻抗	40mΩ MAX
3-3-2.	Temperature Rise 温升	Carrying rated current load(Based upon UL1977) 针对额定电流以作测试		30℃ MAX
3-3-3	Vibration 震动测试	Amplitude:1.52mm P.P –调幅 Sweep time:10-55-10Hz in 1 minute 频率 Duration:2 hours in each X.Y.Z axlals 震动时间 (based upon MIL-STD-202 method 201)	Appearance	No Damage
			Contact Resistance	40mΩ MAX
			Discontinuity 不连续性	1u sec MAX
3-3-4	Shock 冲击测试	50g 3strokes in each X.Y.Z. axlals. (based upon JIS C0041) 50g 力量，XYZ 轴分别三次冲击。	Appearance	No Damage
			Contact Resistance	40mΩ MAX
			Discontinuity 不连续性	1u sec MAX
3-3-5	Heat Resistance 耐热测试	105±3℃, 96hours (based upon JIS C5402 7.8) 时间 96 小时，温度 85±3℃	Appearance	No Damage
			Contact Resistance	40mΩ MAX
3-3-6	Cold Resistance 低温测试	-50±3℃, 96hours (based upon JIS C5402 7.9) 时间 96 小时，温度-20±3℃	Appearance	No Damage
			Contact Resistance	40mΩ MAX
3-3-7	Humidity 恒温恒湿测试	Temperature:40±2℃, Relative humidity:90~95%(RH) (Based upon MIL-STD-202 Method 103B conditions.B) 温度 40±2℃，湿度 90~95%，时间 96 小时。	Appearance	No Damage
			Contact Resistance	40mΩ MAX
			Dielectric strength	没有损坏/没有电弧产生
3-3-8	Temperature cycling 温度冲击测试	5 cycles: 1>.-50℃ 30 minutes. 2>.+105℃ 30 minutes. 3>.+25℃ 30 minutes. 4>.+65℃ 30 minutes	Appearance	No Damage
			Contact Resistance	40mΩ MAX
3-3-9	Salt spray 盐水测试	12 hours exposure to a salt spray from the 5±1% solution at 35±2℃. (Based upon JIS C5402/MIL-STD-202method 101D conditions. B) 时间 12 小时，盐水体比例 5±1%，温度 35±2℃。	Appearance	No Damage
			Contact Resistance	40mΩ MAX

3-3-10	Solderability 沾锡性 测试	Soldering time: 3 ± 0.5 sec, solder temperature: $230 \pm 5^{\circ}\text{C}$ 时间: 3 ± 0.5 秒, 温度: $230 \pm 5^{\circ}\text{C}$	95%以上沾锡面积
3-3-11	Resistance to soldering heat 焊热性 测试	Soldering time: 5 ± 1 sec, solder temperature: $260 \pm 5^{\circ}\text{C}$ 时间: 5 ± 1 秒, 温度: $230 \pm 5^{\circ}\text{C}$	No Damage 外观没有影响
3-3-12	Life Test 寿命测试	5000 cycles 5000 次	No Damage 外观,功能没有影响

4. 产品规格尺寸及材质/Product shape, dimensions and materials

(见附件图纸)